


Klemmbretter Typ KL

Kurzbeschreibung:

Klemmbretter zum Anschluß von Elektromotoren
6-polig, Preßstoff Typ 31, Bolzen, Muttern und Scheiben Messing, blank

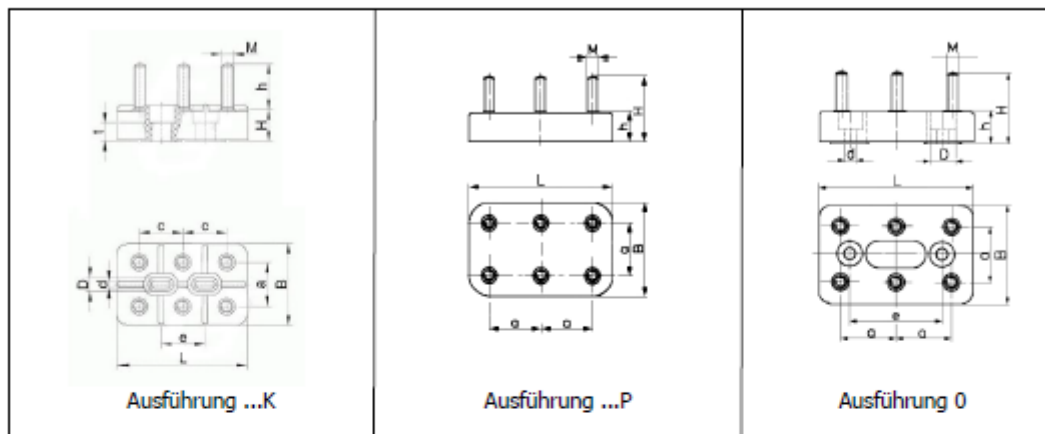

Abmessungen:

Typ	Artikelnr	L	B	M	H	Abmessungen in mm			D Ø	d Ø	Ausführung	Verbindung
KL 0 K	52.010	40	25	3	20	10	15	14-17	8	4,5	Langloch	KV 0
KL 1 K	52.011	50	32	4	22	10	18	16-20	8	5,5	Langloch	KV 1
KL 2 K	52.012	56	36	5	26	11	20	19-23	9,5	6,5	Langloch	KV 2
KL 3 K	52.013	70	45	6	30	13	25	20-29	10,5	7	Langloch	KV 3
KL 6 K	52.016	95	60	8	38	16	35	31-39	12	4,5	Langloch	KV 6
KB 8 S	52.020	120	75	10	55	20	45	31-59	18,5		Langloch	KV 710
KL 31 L	52.022	43	27	4	24	12	16	12-20	12	4,5	Langloch	KV 41
KL 31 N	52.021	44	28	4	21	9	15	15	8,5	5,5	Normal	KV 41
KL 9 K	52.019	54	36	5	26	11	20	20	9,5	7	Normal	KV 2
KL 8 K	52.018	64	40	5	27	12	23	23	11,5	7	Normal	KV 8
KL 5 K	52.015	82	52	6	32	15	30	30	12	7	Normal	KV 5
KL 7 K	52.017	114	70	8	40	18	44	44	12	11	Normal	KV 708
KB 712 S	52.023	114	70	12	59	19	44	44	12	11	Normal	KV 712

KL 0 P	52.030	42	25	3	20	10	15	-	-	-	ungebohrt	KV 0
KL 1 P	52.031	50	32	4	23	11	18	-	-	-	ungebohrt	KV 1
KL 2 P	52.032	56	36	5	27	12	20	-	-	-	ungebohrt	KV 2
KL 3 P	52.033	70	45	6	30	13	25	-	-	-	ungebohrt	KV 3
KL 5 P	52.035	82	52	6	32	15	30	-	-	-	ungebohrt	KV 5
KL 6 P	52.036	95	60	8	39	17	35	-	-	-	ungebohrt	KV 6
KL 7 P	52.037	114	70	8	40	18	44	-	-	-	ungebohrt	KV 708

KL 00	52.000	42	25	3	20	10	15	30	6,3	3,4		KV 0
KL 01	52.001	50	32	4	23	11	18	30	8	4,5		KV 1
KL 02	52.002	56	36	5	27	12	20	32	9,5	5,5		KV 2
KL 03	52.003	70	45	6	30	13	25	50	10,5	6,5		KV 3
KL 05	52.005	82	52	6	32	15	30	65	12	7		KV 5
KL 06	52.006	95	60	8	39	17	35	70	12	7		KV 6
KL 07	52.0071	114	70	8	40	18	44	87	12	7		KV 708